

**Per 19-608(b)**

Landscaping standards for surface parking areas  
At least one large deciduous tree (a species having an average minimum crown spread of greater than thirty (30) feet.) shall be planted in each landscaped area, in lieu of the one small tree required per 19-519(b) (Materials for landscaping standards for surface parking areas).

All other landscaping requirements of sections 19-518, 19-519, & 19-609, shall apply in this district.

**Per 19-608(e)**


Street tree plantings shall be installed in accordance with section 19-518(g)(9)



*Example of perimeter landscaping G*

**Perimeter landscaping G:**

At least one large deciduous tree to be installed for each fifty (50) lineal feet. Continuous hedge forms, no shorter than three (3) feet at planting, for the entire parking lot length. Low shrubs reasonably dispersed throughout.

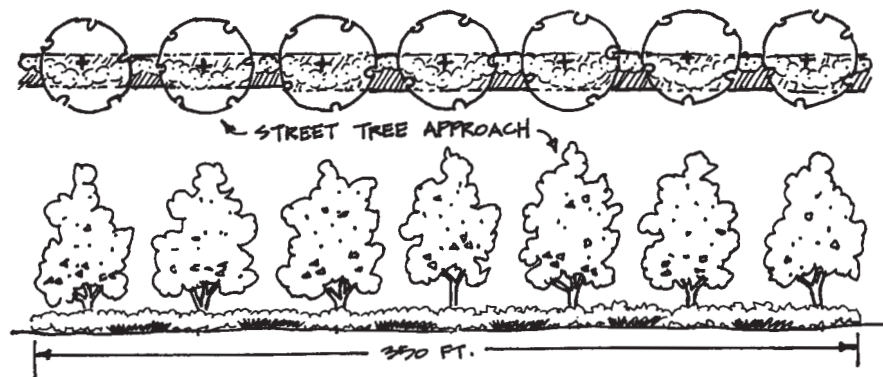

**Per 19-608(e) 1-3**

Trees shall be installed behind the sidewalk.  
Trees installed shall be suitable for use as street trees and shall be able to withstand adverse growing conditions.  
A particular tree species may be required in a specific location based on existing area landscaping.

